




569.00 EUR

incl. 19% VAT, plus [shipping](#)

- AMD Ryzen V1605B !
- 2x LAN !
- 4x DP !
- Mini-ITX !

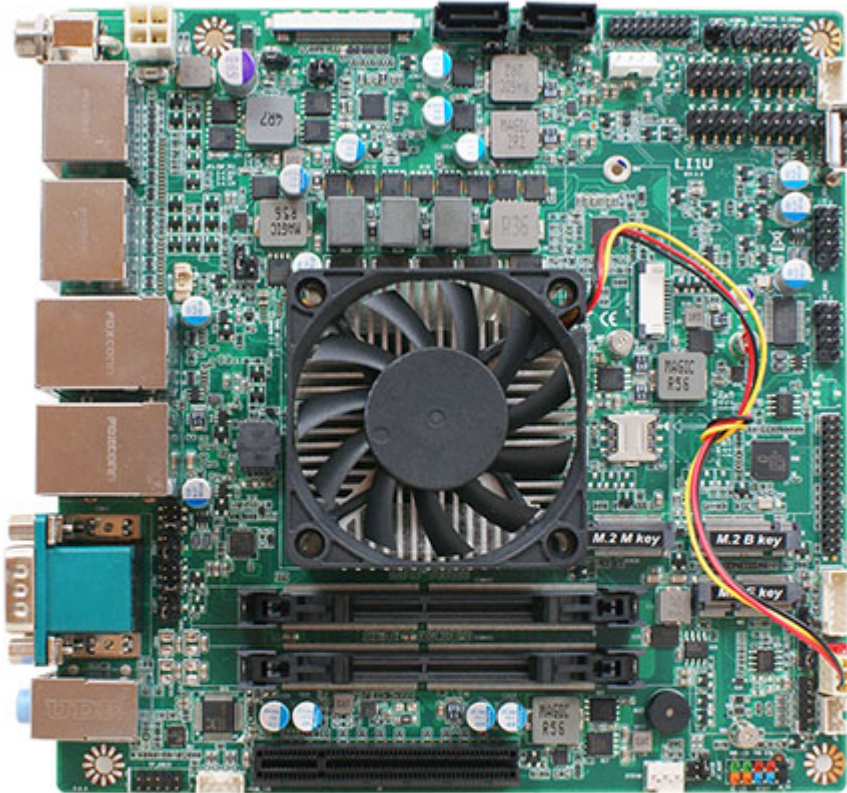

- AMD™ RYZEN™ V1605B 2.0GHz/QC Core Processor
- 2* DDR4 2400MHz up to 32GB
- 2* Realtek® RTL8111H GbE
- 2* SATA III (6Gb/s), 1* M.2 M key (PCIe x2)
- 4* DP(DP0 Co-lay eDP, DP1 Co-lay LVDS)
- 2* RS232/422/485, 4* RS232, 2* USB3.2 (Gen1), 8* USB2.0
- 1* M.2 E key, 1* M.2 B key support 4G/5G Module
- 112~28V DC-in
- MINI ITX Form Factor (170 *170 mm)

Model	– JLI1U-20
Form Factor	– MINI ITX (170 * 170mm)
Processor System	– AMD™ (RYZEN™) Core V1000 Series Processor – V1605B QC, 2.0GHz,15W, Co-lay V1000/R1000 series – AMI 128M Flash ROM
Memory	– 2* DDR4 2400MHz SO-DIMM up to 32GB
Storage	– 2* SATAIII (6 Gb/s, SATA1 Support SATA DOM) – 1* M.2 M-key (2242/2280, PCI-Ex2)

Expansion Slot	– 1* M.2 E-key (2230, support WIFI/BT Module) – 1* M.2 B-key (3042/3052, support 4G/5G Module) – 1* PCIe x8 slot – 1* SIM Card Slot (NANO)
Ethernet	– 2* Realtek® RTL8111H GbE
Graphics	– AMD™ Vega Core Architecture controller, shared memory – 4* DP1.4 (Max Resolution : 4096×2160@60Hz or 3840×2160@120Hz) – 1* eDP1.4 (Max Resolution : 3840×2160@60Hz, Co-lay DP0) – 1* LVDS (Max Resolution : 2560×1600@60Hz, Co-lay DP1) – Support Four Displays
Audio	– Realtek® HD Audio – 3W Speaker Amplifier
Watchdog Timer	– From Super I/O to drag RESETCON# – 256 segments (10sec ~ 255min)
Internal I/O	– 6* USB2.0 (4* PH2.54, 1* PH2.0, 1* Type A) – 4* RS232 – 2* SATAIII – 3* M.2 (1* M key, 1* E key, 1* B key) – 1* GPIO (16 bit, 5V) – 1* AT mode – 1* I2C/SMBUS – 1* PS2 – 1* Case Open – 1* Speaker
External I/O	– 4* DP – 2* RJ45 – 2* USB 3.2 (Gen1) – 2* USB2.0 – 2* RS232/422/485 – 1* Audio jack – 12~28V DC-in
Power	12~28V DC-in, AT/ATX Supported – AT: Directly PWR on as Power input ready – ATX: Press Button to PWR on after Power input ready
Compliance	– CE, FCC, RoHS, REACH
Temperature	– Operating: 0°C ~ 60°C – Storage: -20°C ~ 70°C – Humidity: 10% ~ 90% RH @40°C (non-condensing)
Warranty	– 2 Years Limited Warranty