


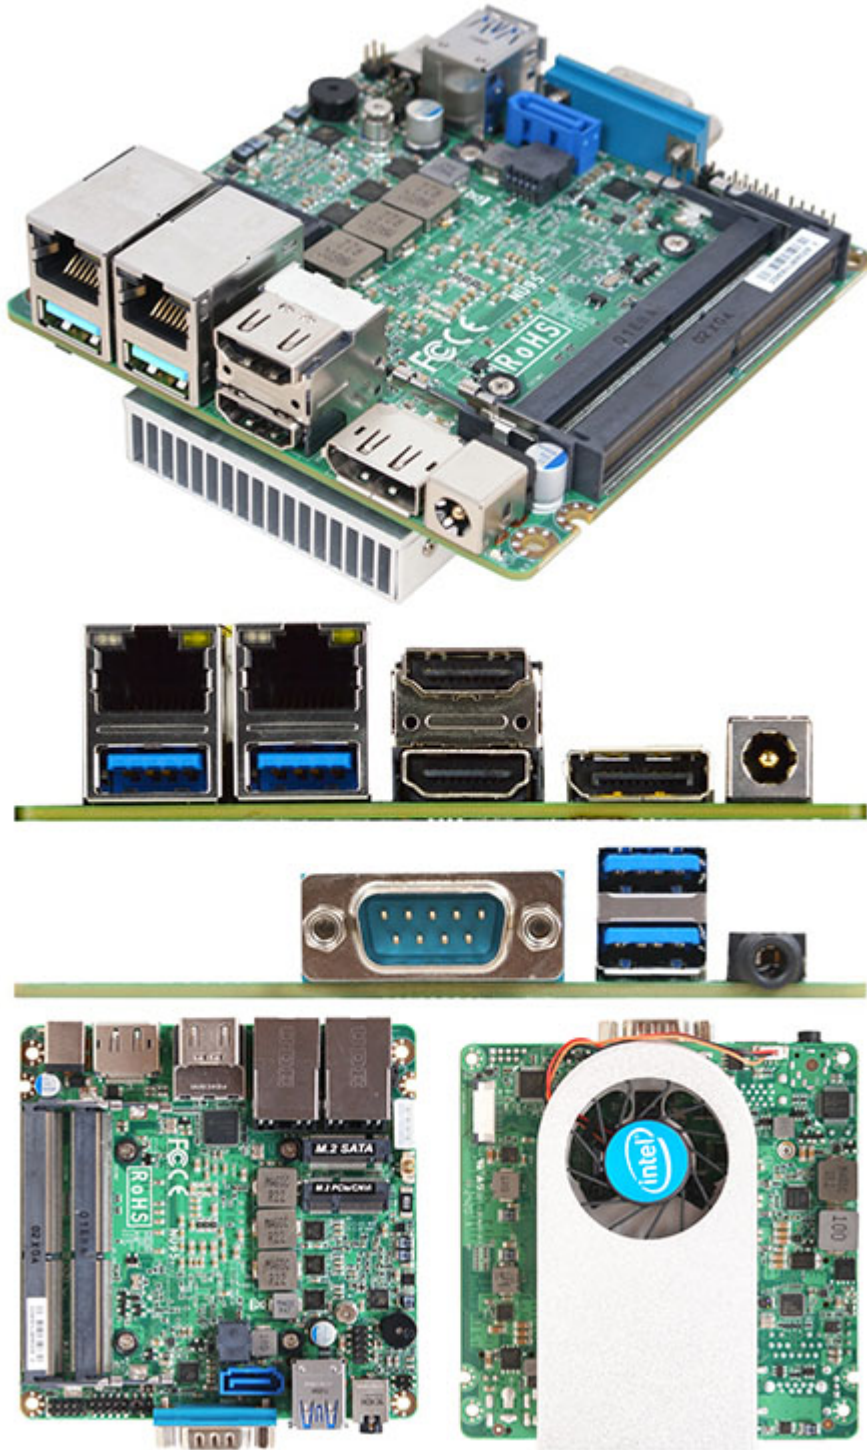

198.00 EUR  
incl. 19% VAT, plus [shipping](#)

- Intel Comet Lake !
- NUC Formfactor !
- Support Triple Displays !

- Intel® Celeron® Prozessor 5205U
- 2\* DDR4 2666MHz up to 64GB
- 1\* Intel® I219LM GbE, 1\* Intel® i211AT GbE
- 1\* SATAIII, 1\* M.2 (M key), 1\* M.2 (E key) Support CNVi
- 2\* HDMI, 1\* DP
- 1\* RS232/422/485, 4\* USB3.2, 2\* USB2.0
- 12~24V DC in
- NUC Form Factor (101 \*101 mm)

|                    |                                                                                                                                                                            |
|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Form Factor        | – NUC (101 * 101mm)                                                                                                                                                        |
| Processor System   | – Intel® Celeron® Prozessor 5205U<br>– SoC chipset<br>– AMI 128M Flash ROM BIOS                                                                                            |
| Expansion Slot     | – 1* M.2 M key (2242, SATA interface)<br>– 1* M.2 E key (2230, Support CNVi)<br>– 1* SATAIII                                                                               |
| Memory             | – 2* DDR4 2666 MHz SO-DIMM up to 64GB                                                                                                                                      |
| Graphics           | – 1* HDMI1.4 (Max Resolution : 4096×2304@30Hz)<br>– 1* HDMI2.0 (Max Resolution : 4096×2304@60Hz)<br>– 1* DP (Max Resolution : 4096×2304@60Hz)<br>– Support Triple Displays |
| Ethernet           | – 1* Intel® I219LM GbE<br>– 1* Intel® i211AT GbE                                                                                                                           |
| Audio              | – HD Audio: Realtek® ALC662                                                                                                                                                |
| SATA               | – 1* SATAIII (6.0Gb/s)                                                                                                                                                     |
| Rear I/O           | – 2* HDMI<br>– 1* DP<br>– 2* RJ45<br>– 2* USB3.2 (Gen2)<br>– 12~24V DC-in                                                                                                  |
| Front I/O          | – 1* Audio (Line-out, MIC)<br>– 1* RS232/422/485 (Support 5/12V TTL)<br>– 2* USB3.2 (Gen2)                                                                                 |
| Internal Connector | – 2* USB2.0<br>– 1* SATAIII (6.0Gb/s)<br>– 1* M.2 (M key)<br>– 1* M.2 (E key)<br>– 1* GPIO (8bit, 5V)<br>– 1* AT mode                                                      |
| Watchdog Timer     | – From Super I/O to drag RESETCON#<br>– 256 segments (10 ~ 255min)                                                                                                         |
| Power              | 12~24V DC-in, AT/ATX Supported<br>– AT: Directly PWR on as Power input ready<br>– ATX: Press Button to PWR on after Power input ready                                      |
| Compliance         | – CE, FCC, RoHS, REACH                                                                                                                                                     |
| Temperature        | – Operating: 0°C ~ 60°C<br>– Storage: -20°C ~ 85°C<br>– Humidity: 10% ~ 90% RH @40°C (non-condensing)                                                                      |
| OS Support         | – Windows 10, Linux                                                                                                                                                        |